

HR Range

HR(High Rate)range Valve Regulated Lead Acid (VRLA) batteries have been developed with high efficiency active materials to stimulate inside the battery with higher power output when the battery is discharged to a extent level of discharging. Along with high-density structure design for relatively smaller inner resistance which will significantly improve the performance for high rate discharging when high power output service is needed.

Application


- | | |
|-------------------------|------------------------|
| Alarm System | Security System |
| Cable Television | Medical Equipment |
| Cable Television | Toys |
| Communication Equipment | UPS |
| Control Equipment | Emergency Power System |

General Features


- Sealed and maintenance free operation.
- Non-Spillable construction design.
- ABS containers and covers(UL94HB, UL94V-0) optional.
- Safety valve installation for explosion proof.
- High quality and high reliability.
- Exceptional deep discharge recovery performance.
- Low self discharge characteristic.
- Flexibility design for multiple install positions.

Construction





- | | | | |
|-----------------|--------------|--------------------|---------------|
| Component | Raw material | Sealant | Epoxy Resin |
| Positive | Lead dioxide | Safety valve | EPDR |
| Negative | Lead | Terminal | Copper |
| Container | ABS | Separator | Fiber glass |
| Cover | ABS | Electrolyte | Sulfuric acid |

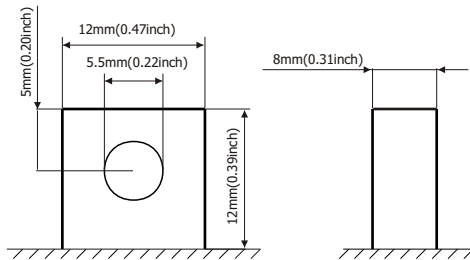

Standard Terminal Dimensions
(Optional terminal please check terminal information page)

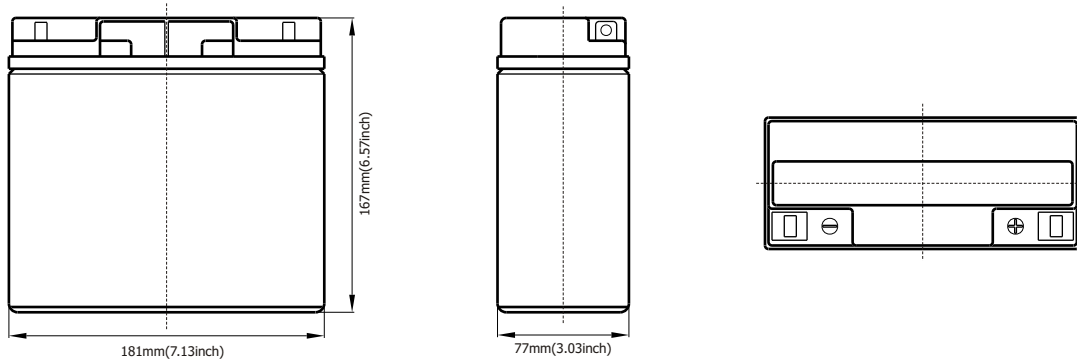

Battery Model	GT12-18HR (75W to 1.67V, 15min)			
Designed Floating Life	5-6 Years			
Capacity(25°C)	20HR(1.02A,175V)	10HR(2A,175V)	5HR(3.4A,175V)	1HR(13A,175V)
	20.4AH	20AH	17AH	13AH
Dimensions	Length	Width	Height	Total Height
	181mm(7.13inch)	77mm(3.03inch)	167mm(6.57inch)	167mm(6.57inch)
Approx. Weight	6Kg (13.23 lbs)			
Internal Resistance	Full charged at 25°C: 0.014 Ohm			
Self Discharge	3% of capacity declined per month at (25°C)			
Capacity Affected by Temp.(20HR)	40°C	25°C	0°C	-15°C
	102%	100%	85%	65%
Charge Voltage(25°C)	Cycle use		Float use	
	14.4-15V(-30mV/°C), max. Current: 5A		13.6-13.8V(-20mV/°C)	

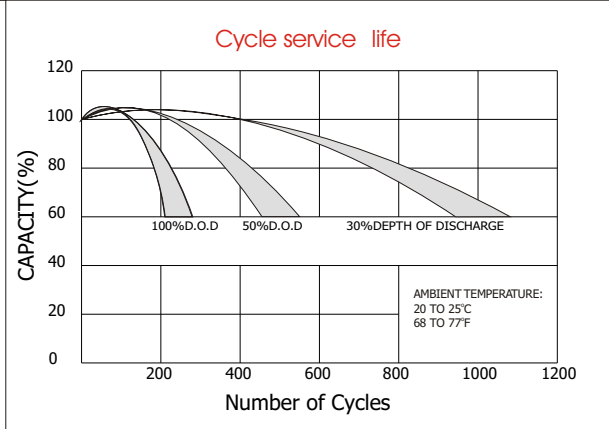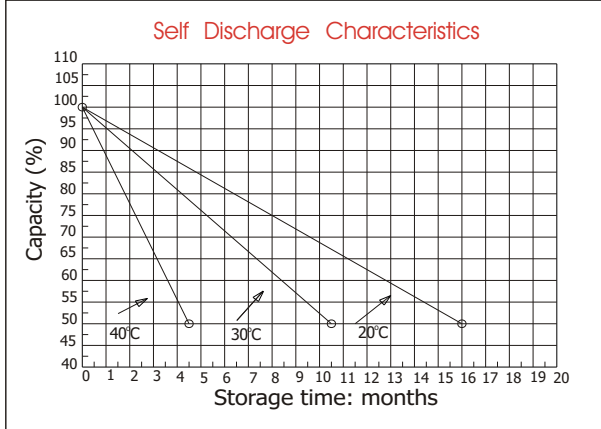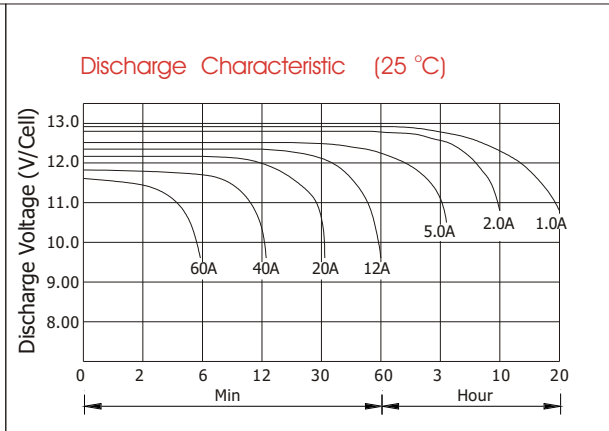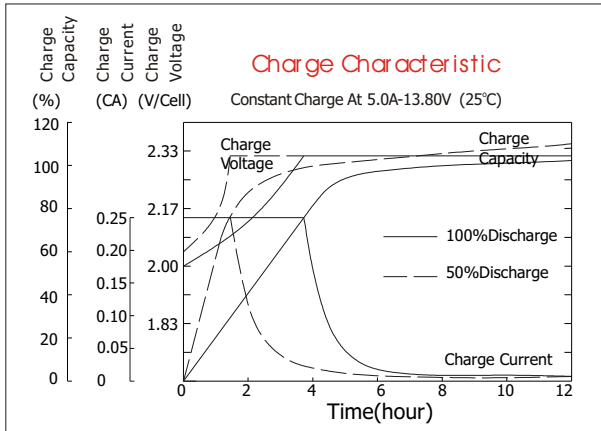

Constant current discharge ratings-amperes at 25°C

F. V/Time	5MIN	10MIN	15MIN	30MIN	1HR	3HR	5HR	10HR	20HR
1.60V	88.6	55.1	41.6	25.4	14.2	6.24	3.81	2.08	1.12
1.67V	83.2	52.3	40.0	24.3	14.0	6.00	3.73	2.06	1.08
1.70V	76.2	50.4	39.1	22.1	13.6	5.60	3.65	2.05	1.07
1.75V	74.7	48.8	37.8	21.0	13.0	5.41	3.57	2.04	1.04
1.80V	66.9	46.6	34.3	19.4	12.1	5.20	3.36	2.00	1.01
1.85V	59.0	44.4	30.9	17.9	11.3	5.01	3.15	1.97	0.99

Constant power discharge ratings-watts at 25°C

F. V/Time	5MIN	10MIN	15MIN	30MIN	1HR	3HR	5HR	10HR	20HR
1.60V	155.5	99.6	75.9	45.7	25.7	11.1	6.44	4.27	2.24
1.67V	150.1	97.1	75.0	44.7	25.5	10.7	6.42	4.24	2.16
1.70V	141.3	96.1	74.4	41.9	25.0	10.2	6.33	4.21	2.13
1.75V	142.2	95.8	73.7	40.7	24.6	10.0	6.28	4.16	2.08
1.80V	130.1	94.4	68.4	38.8	23.2	9.71	6.08	4.11	2.06
1.85V	118.0	89.5	62.0	36.3	21.8	9.41	5.89	4.05	2.03

